

## ***ALUMINIUM RAILS***



## **USER S MANUAL**

## Table of Contents

1	Homepage .....	1
2	Table of Contents .....	2
3	RAILS classify、Diagram .....	3
4	All slides Diagram .....	4
5	Configuration and Dosage .....	4
6	RAILS track Introduce .....	4
7	Installation Steps .....	5
8	Installation Steps .....	6
9	Parts .....	7
10	RAILS Size .....	7

---

**WARNING:** Handling of lead solder materials used in this product may expose you to lead, a chemical known to the State of California to cause birth defects and other reproductive harm.

---



1) RAILS classify

- (1) 2U - 5U case applicable, or all aluminum alloy
- (2) convenient installation, safe
- (3) the rated load of up to 145 pounds
- (4) the slide rail points: 24 inches



[www.ednse.com](http://www.ednse.com)

2) RAILS Diagram

Usage: a pair of 2, only used in a drawer


Screw fixed slide rail




Mushroom oncomelania silk will slide Fixed on both sides of cabinet



Mushroom oncomelania silk will slide Fixed on both sides of cabinet

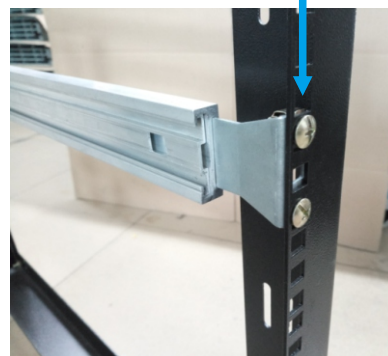

3) All slides Diagram

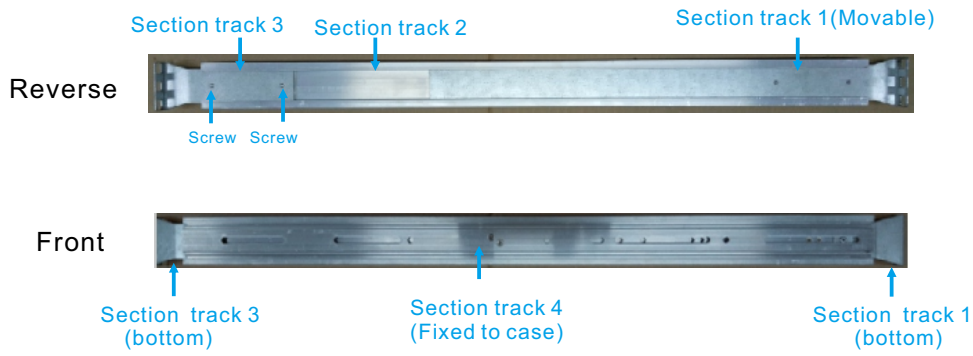

4) Configuration and Dosage

Configuration and Dosage	
1、 track 1	2PCS
2、 track 2 (Bridge rail)	2PCS
3、 track 3	2PCS
4、 track 4	4PCS
5、 Screw FM4x4	18PCS
6、 Mushrooms nails 5.8x15 Sockets (nut)	4PCS

Schematic diagram of fixed on the chassis



5) RAILS track Introduce



← Section track 1 (Long L Form) (Movable)  
Connect slides and chassis, through screws  
On both sides of the case





← Section track 2 (Bridge rail)  
Ball bearing structure with track 1 and track 3, which  
can guarantee Draw more smooth



← Section track 3 (Short the L shape)  
Connect slides and cabinets, through screws  
On both sides of cabinet, length is adjustable



← Section track 4  
Both side screwed to the chassis

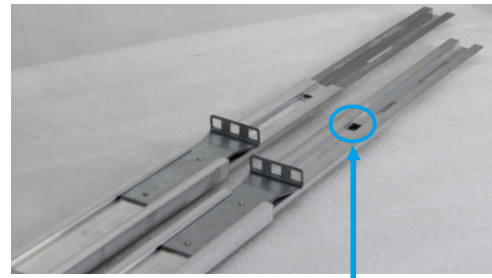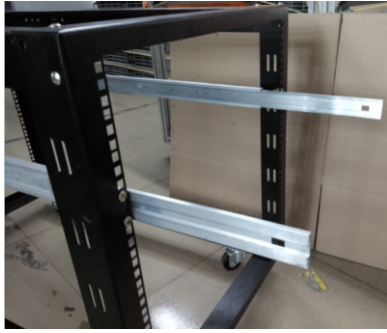


①

According to this position can be completely pulled the fourth orbit

### 6) Installation Steps

- 1、 Pull out the fourth orbit completely, according to the orbit position, as pictured.
- 2、 Use flat screw Fm4x4 On both sides of tightening to the chassis.

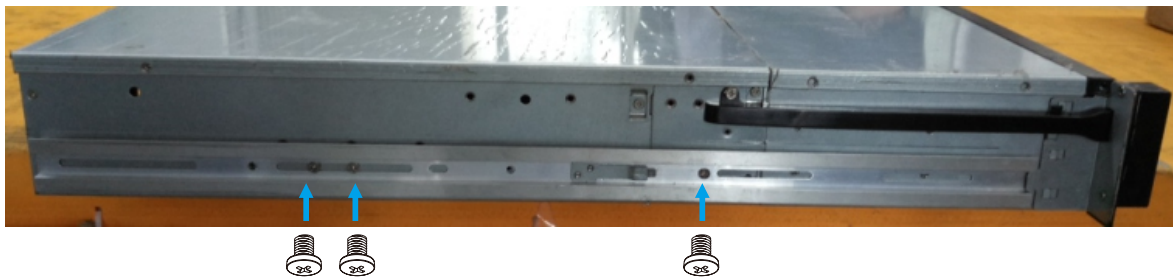

②


3. Track 4 orbits with flat screw FM4x4 Tightening.  
(the amount of 2 PCS, Track 4 regardless of left and right)

**Note:**

The fourth orbit must be inserted into the chassis bolt position,  
Then tighten the screws



④

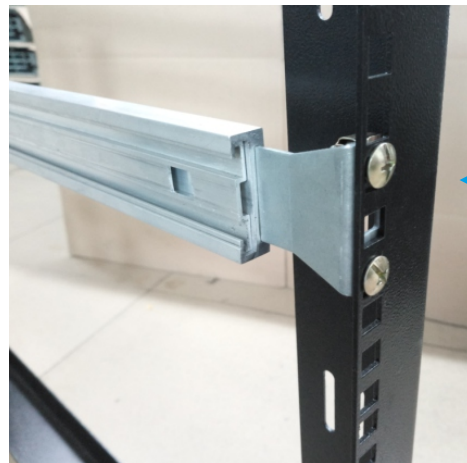


On the server rack with snail screw.

- 4 Track 1 and 3 installed in the cabinet of the track, using mushrooms nails will orbit, fixed in front and 4 each slide rail use 4 PCS screws, a total of 8 PCS.



On the server rack installation drawing


NOTES:Track 1 can be stretched, according to the cabinet length is set, then tighten the screws. Pay attention to the two slides need to be in the same plane.

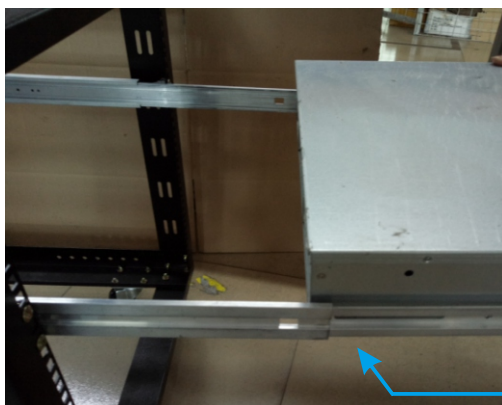

⑤


Aim the installed orbit 4 case 2 into orbit

- 5、 Aim the packed the fourth track chassis, the second orbit position, slowly push, heard making a sound, The box is fixed on the rack slide rail.

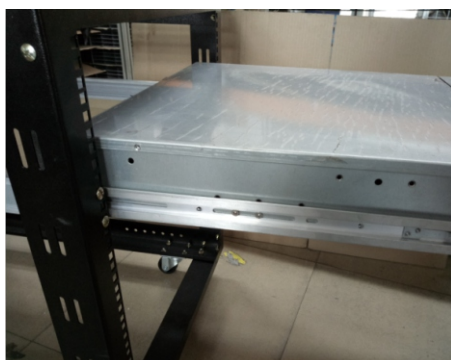


NOTES:Push style, pay attention to the slippery course on both sides of the need to push at the same time, forcibly even push. If not level off, can you repeat the steps.

7) PARTS

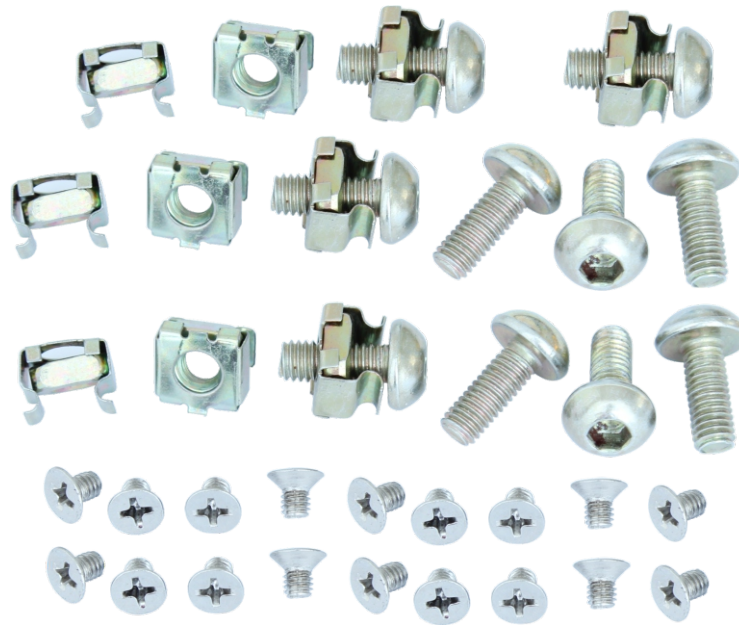

8) RAILS Size

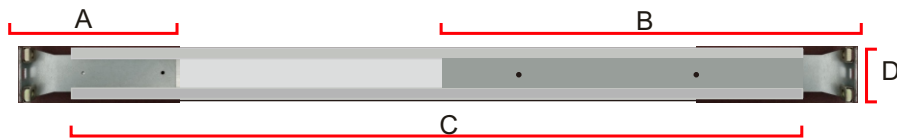

NO SIZE	A	B	C	D	E	F
24寸	12	42	60	4.6	1.3	1.5